


# 5017D / 5017H

## 18 GHz Fiber-Optic Delay Line

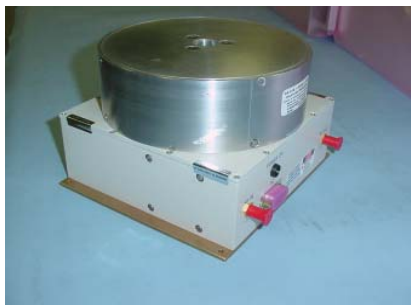

The 5017D and 5017H 18 GHz delay line delivers unmatched performance for radar testing, signal processing, phased antenna array, and phase noise testing. These rugged devices eliminate many of the problems that are inherent in alternative transceiver technologies.

Ortel's fiber-optic transceivers provide bandwidth that is essentially independent of fiber length, loss or delay, and triple transit signals that are immeasurable. In addition to enhanced electrical performance, the delay lines provide several mechanical advantages. Ortel's technology takes advantage of the rigid yet flexible properties of fiber-optic cable to provide enhanced phase and group delay characteristics. The small size of these components allows for a long delay in a compact package with the superior temperature stability of fiber.



### Ordering Information

| Model Number | Description                             |
|--------------|---|
| 5017D-XXXX   | Transceiver, 18 GHz, SMA, 8 μ-sec max   |
| 5017H-XXXX   | Transceiver, 18 GHz, SMA, 110 μ-sec max |



### Features

- Bandwidth to 18 GHz
- High dynamic range
- -40 to +65 C
- 1310 nm
- Flat frequency response
- Low phase noise

### Applications

- Radar testing
- Signal processing
- Phased antenna array
- Phase noise processing
- Antenna remoting

Delay Time XXXX = X (hundreds) X (Tens) X (Ones) X (Tenths)

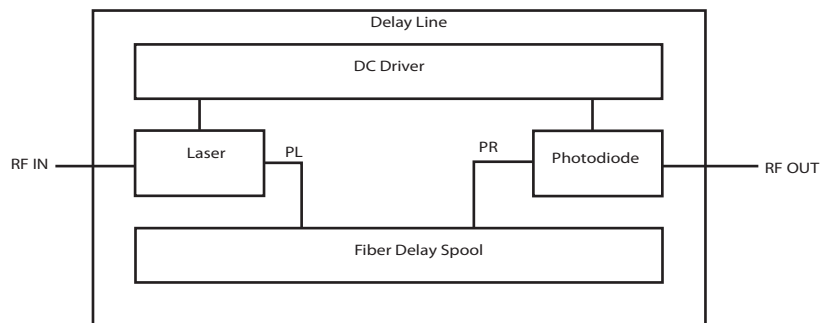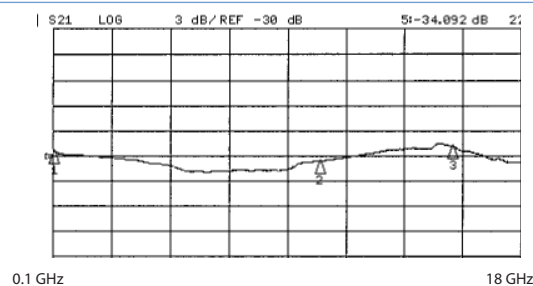

# 5017D / 5017H

## 18 GHz Fiber-Optic Delay Line



MICROWAVE

### Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

| Parameter                                | Min | Max | Unit |
|--|-----|-----|------|
| Operating Temperature Range of Baseplate | -40 | +65 | °C   |
| Storage Temperature                      | -55 | +85 | °C   |
| RF Input Power                           | -   | 20  | dBm  |

### DC Interface Characteristics

| Pin Number | Min  | Typ | Max  | Max Ripple | Current   |
|------------|------|-----|------|------------|-----------|
| 1          | 14V  | 15V | 16V  | 100 mV p-p | 0.3 A max |
| 2          | 4.5V | 5V  | 5.5V | 200 mV p-p | 1.6 A max |

### Front Panel LEDs

- Power On

### Pin/Package Information

Nine-Pin, Male D-sub Connector

| Pin Number | Function                                  |
|------------|---|
| 1          | +15 Vdc                                   |
| 2          | +5 Vdc                                    |
| 3          | Not Used                                  |
| 4          | Ground                                    |
| 5          | Ground                                    |
| 6          | Laser Photodiode Current Monitor          |
| 7          | Photodiode Current Monitor                |
| 8          | Laser Current Monitor                     |
| 9          | Laser Over Temperature Alarm <sup>1</sup> |

1. Open Collector Output

### Laser Safety

This product emits no optical radiation, therefore it is considered eye safe.

However it does contain a Class IIIB laser, so be serviced only by Emcore.

### RF Interface - SMA Female

#### dc Monitor Voltages

- Laser Photodiode Current, pin 6  
1V/1mA (into 1 MOhm load). Proportional to laser optical power
- Photodiode Current, pin 7  
1V/1mA (into 1 MOhm load). Proportional to laser optical power
- Laser DC Current, pin 8  
1V/100mA (into 1 MOhm load)

#### Alarm Circuits

- Laser Over Temperature Alarm, pin 9  
Laser Temperature. This alarm is ON (sinks current) if the laser substrate temperature is more than 2 °C higher than the factory setpoint. The alarm is not activated if the temperature is LOWER than the setpoint.

# 5017D / 5017H


## 18 GHz Fiber-Optic Delay Line

### Electrical Characteristics

| Parameter   | 5017D     | 5017H     | Units      |
|---|-----------|-----------|------------|
| Upper Band Edge Frequency                           | 18        | 18        | GHz        |
| Lower Band Edge Frequency                           | 0.1       | 0.1       | GHz        |
| Amplitude Flatness                                  | 5         | 5         | dB         |
| Insertion Loss, 8 $\mu$ -sec <sup>1</sup>           | 36        |           | dB         |
| Insertion Loss, 110 $\mu$ -sec <sup>1</sup>         |           | 56        | dB         |
| Max Delay   | 8         | 110       | $\mu$ -Sec |
| Input RF Return Loss, max<br>0.1 - 10 GHz           | -7.0      | -7.0      | dB         |
| 10 - 18 GHz   | -4.0      | -4.0      | dB         |
| Output RF Return Loss, max<br>0.1 - 10 GHz          | -9.0      | -9.0      | dB         |
| 10 - 18 GHz   | -6.0      | -6.0      | dB         |
| Impedance   | 50        | 50        | Ohm        |
| Input 1 dB Compression, min                         | +20       | +20       | dBm        |
| Input Third Order Intercept, min<br>0.1 GHz - 4 GHz | +30       | +30       | dBm        |
| 4 GHz - 18GHz                                       | +25       | +25       | dBm        |
| Noise Figure, max.<br>0.1 GHz - 4 GHz               | 49        | 59        | dB         |
| 4 GHz - 10 GHz                                      | 54        | 64        | dB         |
| 10 GHz - 15 GHz                                     | 64        | 74        | dB         |
| 15 GHz - 18 GHz                                     | 69        | 79        | dB         |
| Delay Accuracy                                      | $\pm 1.0$ | $\pm 1.0$ | %          |

1: Shoter delays will have lower loss

### OUTLINE DRAWING

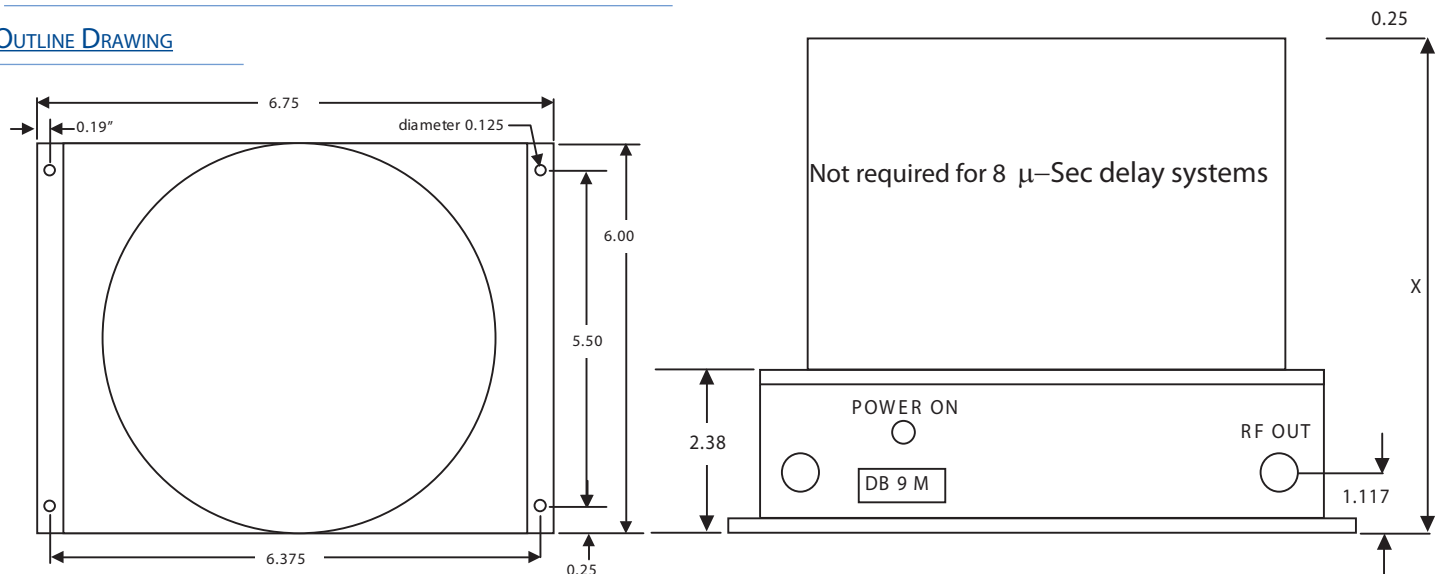

#### Dimension "X"

- 8  $\mu$ -Sec Max: 2.38 inches
- 35  $\mu$ -Sec Max: 4.38 inches
- 60  $\mu$ -Sec Max: 5.38 inches
- 80  $\mu$ -Sec Max: 6.38 inches
- 110  $\mu$ -Sec Max: 7.88 inches

Rev: December 15, 2010