



Applications

- CATV
- Broadband LANs
- Distance Learning
- Multiple Data Services

Features

- Transmits Up to 79 Channels Over One Singlemode Fiber at 1310 nm
- VSB/AM Transmission Ensures Compatibility with Standard CATV Modulators, Processors, etc
- Transmitter Includes Status Indicator LED's that Provide Easy Assessment of the Transmitter's Performance
- Excellent for Structured In-Building Premise Wiring Video Distribution
- High-Capacity Backbone Transport for Multiple Data Services (RS-232, T1/E1, Ethernet, etc.) Via CATV RF Modem
- CATV HFC Distribution Network, Distance Learning, CCTV Video Surveillance, Campus Video Distribution, Teleconferencing and More
- +13 dBm Optical Output Power Supports Links to Beyond 20 km


The 2805 79 Channel CATV PNS transmitter is part of a robust system for transporting up to 79 Channels of VSB/AM modulated signals over a singlemode optical fiber. The system provides 40-870 MHz of usable bandwidth for video signals stacked at 6 MHz intervals. A low loss singlemode fiber allows full channel loading to beyond 20 km while maintaining a good carrier-to-noise ratio. The 2805 may be used with the 2807 mini-node receiver for use in return path and multiple splitter applications or with the 2808 receiver for basic 79 channel CATV transmission. In all cases, the link provides excellent performance for many demanding applications such as broadband LANs, distance learning, and multiple data services.

RF and Optical Characteristics

Parameter	Min	Typ	Max	Units
Channel Loading	-	-	79	ch.
Operating Wavelength	1290	1310	1330	nm
Bandwidth	40	-	870	MHz
Input/Output RF Impedance	-	75	-	Ohms
Side Mode Suppression Ratio	30	-	-	dB
Back Reflection Tolerance	-	-	-50	dB
Required Fiber Bandwidth	2,000	-	-	MHz
Composite Second Order (CSO)	-	-60	-	dBc
Composite Triple Beat (CTB)	-	-65	-	dBc
Carrier-to-Noise Ratio		56.5		dB

System performance specifications indicated for use with 9/125 μ m singlemode fiber.

Network Diagram

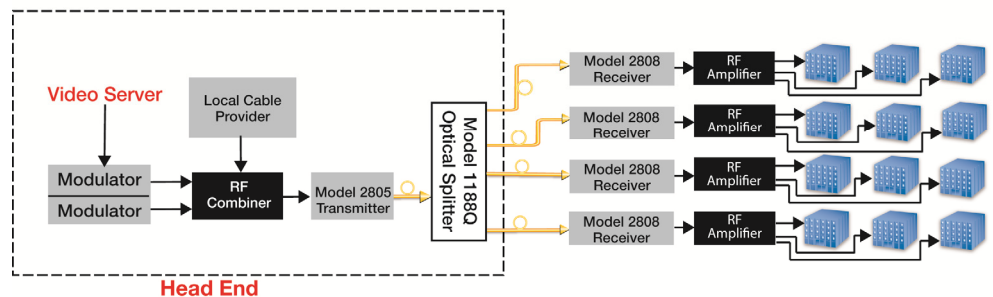

Electrical Characteristics

Parameter	Min	Typ	Max	Units
Power Supply Voltage	-	120	240	V _{AC}
Power Supply Frequency	50	60	-	Hz
Power Dissipation	-	20	-	Watts
Fuse Rating (Slow Blow)		1.25		A

Physical Characteristics

Parameter	Min	Typ	Max	Units
Weight	-	5.5 2.5	-	lbs kg
Dimensions	-	19 x 1.72 x 12.1 483 x 43.7 x 307	-	in mm

Environmental Characteristics

Parameter	Min	Typ	Max	Units
Operating Temperature Range	0	-	+45	°C
Storage Temperature Range	-20	-	+70	°C
Relative Humidity	0	-	90	%

79 Channel Transmitter Part Numbers

Part Number (SC/APC Optical Connector)	Part Number (FC/APC Optical Connector)	Description
2805TD-SCSP/06	2805TD-SCAP/06	1 RU Transmitter, +6 dBm Optical Output Power
2805TD-SCSP/08	2805TD-SCAP/08	1 RU Transmitter, +8 dBm Optical Output Power
2805TE-SCSP/10	2805TE-SCAP/10	1 RU Transmitter, +10 dBm Optical Output Power
2805TF-SCSP/12	2805TF-SCAP/12	1 RU Transmitter, +12 dBm Optical Output Power
2805TG-SCSP/13	2805TG-SCAP/13	1 RU Transmitter, +13 dBm Optical Output Power