





# Model Number: NGM-27-xxxx


Enigma IF Switch Matrix / Router

RF Engineering  
and Custom Build

## NEW FEATURES:

A number of new features have been introduced to the Enigma matrix, including those described below:


**Fast Matrix Card Changeout** from front and rear

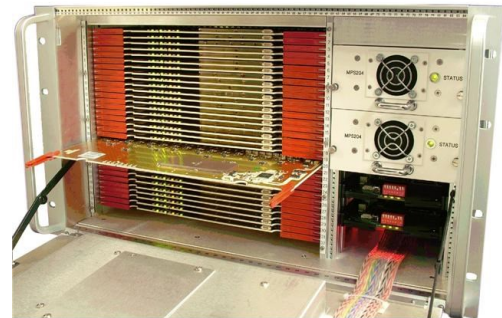

**On board log** records all routing changes for each user



**Touchscreen VGA** control with security log on for up to 10 users

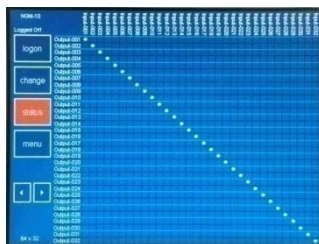

**Aliases** (10 character) on front screen to identify signal sources



## FLEXIBILITY

The Enigma Matrix can be adapted and grown to a number of different sizes

**Master Matrix** offers routing control from touchscreen or remotely

**All modules offer hot-swap CPUs and PSUs** for peace of mind



Front View

**Hot-Swap Input & Output Matrix Cards** on all modules offer easy expansion

**Active Splitter & combiners** offer patch panel & gain options



# Model Number: NGM-27-xxxx


Enigma IF Switch Matrix / Router

RF Engineering  
and Custom Build

## Resilience

### Resilience is designed-in

The Enigma matrix has been designed with resilience in mind. The impact of component failure is minimised and all active components can be hot swapped. Problems are rapidly identified and can be easily sorted out.


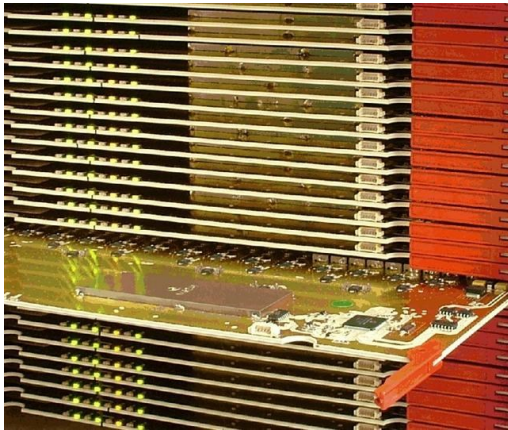


### Minimal impact from card failure

One card per input and one card per output mean that the impact of card failure is minimised. Cards can be hot-swapped, and hot expansion can take place in single increments.

### Minimal impact from CPU failure

The matrix contains dual redundant CPU's which both operate in parallel. If one CPU fails the other automatically becomes the master. CPU's can be hot-swapped.

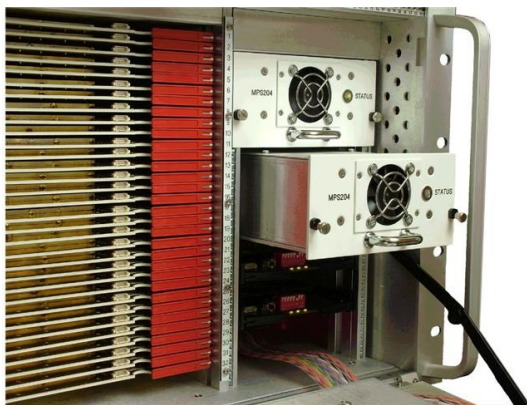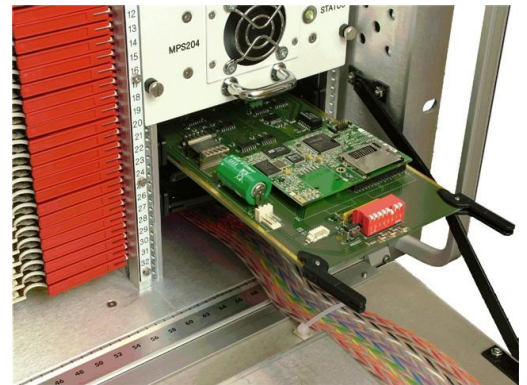

### Minimal impact from PSU failure

Dual redundant PSU's can be hot-swapped.

### Rapid diagnosis of problems

The matrix continuously monitors the conditions of amplifiers, CPUs and PSUs. Any faults are immediately reported through the front panel and remotely. Alarms report the specific faults down to component level.





# Model Number: NGM-27-xxxx

RF Engineering  
and Custom Build

## Enigma IF Matrix Router

### Technical specifications and operating parameters

RF Parameters					
Capacity	32 inputs x 32 outputs				
Routing	Distributive, DC blocking	Any input can be connected to any number of outputs			
Frequency Range	50-200 MHz (IF)				
RF Connectors	50Ω BNC	50Ω SMA	75Ω BNC	75Ω F-type	
Flatness	50- 200MHz	±1.0 dB	±1.0 dB	±1.0 dB	±1.2 dB
	Any 36MHz	±0.25 dB	±0.25 dB	±0.25 dB	±0.50 dB
Input Return Loss	20 dB typ	20 dB typ	12 dB typ	12 dB typ	
Output Return Loss	20 dB typ	20 dB typ	12 dB typ	12 dB typ	
Gain	0 dB ± 1 dB nominal mean across band				
1 dB Compression	+5 dBm				
OIP3	+15 dBm				
Noise Figure	20 dB typical				
Isolation	I/P - O/P	> 80 dB			
	I/P - I/P	> 80 dB			
	O/P - O/P	> 80 dB			

Power	
AC Power	85-264Vac 50/60Hz
PSU	Dual redundant
Hot-swap PSU	Yes

System Control	
Local Control	Touchscreen & VGA Display
Remote Control	Via RS232/RS485 and RJ45 Ethernet, with SNMP & web browser interface
Comms/Power Failure	Retains settings

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	20-90% non-condensing

Key Features	
Input Splitter Cards	One Card per Input
Output Switch Cards	One Card per output
Matrix Cards	Single, Hot-swap
CPU	Dual redundant, Hot-swap
PSU	Dual redundant, Hot-swap
Self Diagnostics	Continuous Monitoring

Physical	
Dimensions	6U high x 450mm deep x 19" wide
Weight	29 kg Fully Populated
Colour	White 00-E-55 semi-gloss

ETL SYSTEMS LIMITED  
Coldwell Radio Station  
Madley  
Hereford  
England HR2 9NE

TELEPHONE  
+44 (0)1981 259020  
  
EMAIL  
info@etlsystems.com

FACSIMILE  
+44 (0)1981 259021  
  
WEB  
www.etlsystems.com

